


AND FIRE RATED  
PFTM<sup>™</sup> DOOR FRAMES



# FIRE RATED DOORS

Fire, one of the four elements is an important part of our world. However, its flames have the potential to cause severe physical damage. Fires not only have a negative impact on the environment, they also impact the lives of people and their property. It is essential to have the best and safest products to protect you and your loved ones around this element.

To minimize the severity of a fire, our Plastpro Fire Rated Doors are extremely durable. Made with fire-resistant composite, our doors are tested and comply with safety and performance standards to withstand fire for a minimum of 20 minutes. Certain models are available to hold off fire for 60 and 90 minutes. Our doors add extra protection to your home without ever sacrificing style.

## 1 EXTENDED LOCKBLOCK

The full length LVL increases the rigidity of the door.

## 2 FIRE RETARDANT COMPOSITE

Our HFO Polyurethane fire rated foam system is specially formulated to withstand fire.

## 3 FULL LENGTH COMPOSITE STILES

Our full-length composite stiles protect the door from external exposure.

## 4 PLASTPRO® EXCLUSIVE SMC SKIN

Our skin material is specially formulated and comes in various panel configurations.

## 5 COMPOSITE BOTTOM RAIL

High strength rails prevent moisture from seeping into the door.



## TESTING RESULTS

Our 20 minute Fire Rated doors are tested for single swing fiberglass doors. Tests are done to multiple standards and bear the Warnock Hersey Mark of product safety, performance, and quality.

**ULC 10 C / NFPA 252 / ASTM E 2074 | FIRE RATED  
CSFM 12-7A-1 | EXTERIOR WILDFIRE EXPOSURE TEST**

- 6'8" Doors are tested with Wood, Steel & 20 min Fire Rated PF™ Door Frame
- 7'0" Doors are tested with Wood & 20 min Fire Rated PF™ Door Frame
- 8'0" Doors are tested with Wood & 20 min Fire Rated PF™ Door Frame
- All Doors are tested for single units only

# 20 MINUTE FIRE RATED DOORS



Oak Series • DRG60 • Fire Rated

20 MINUTE FIRE RATED OAK GRAIN



DRG002



DRG00702



DRG00802



DRG292



DRG602


● IN STOCK

● EXTENDED LEAD TIME

20 MINUTE FIRE RATED



# 20 MINUTE FIRE RATED DOORS

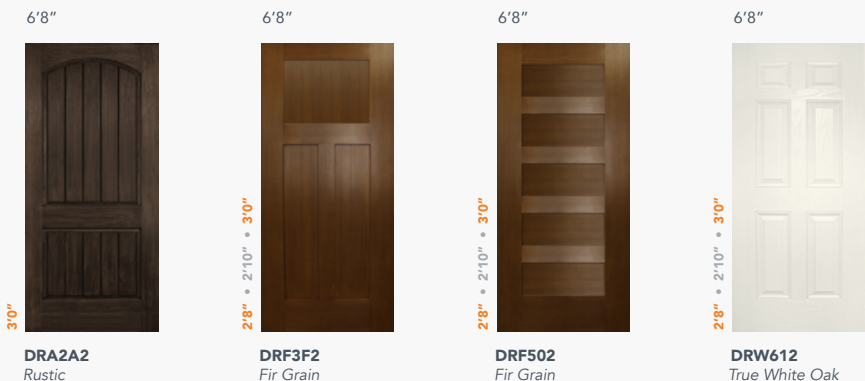



20 MINUTE FIRE RATED

20 MINUTE FIRE RATED SMOOTH SKIN




20 MINUTE FIRE RATED TEXTURED

# 60 & 90 MINUTE FIRE RATED DOORS

60 MINUTE FIRE RATED

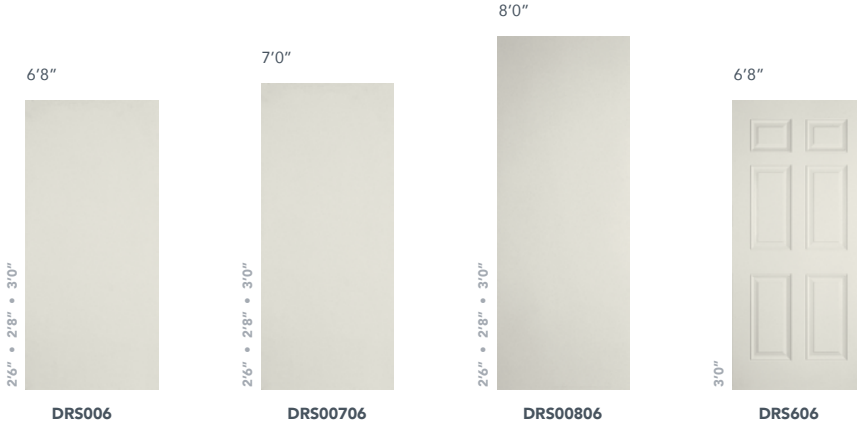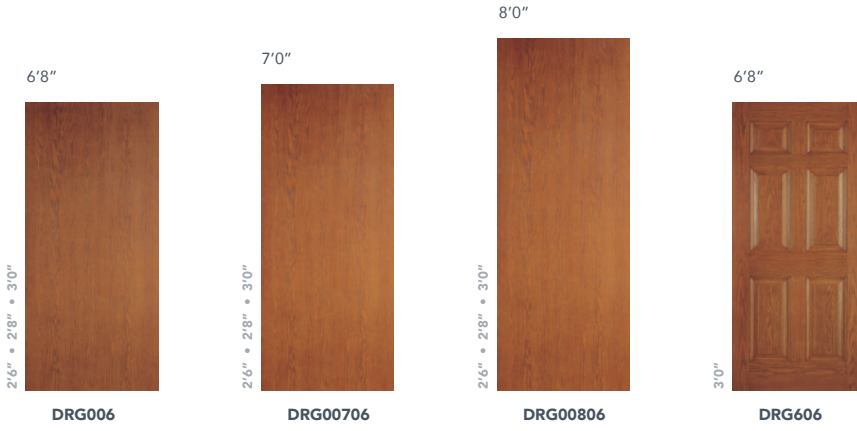

90 MINUTE FIRE RATED

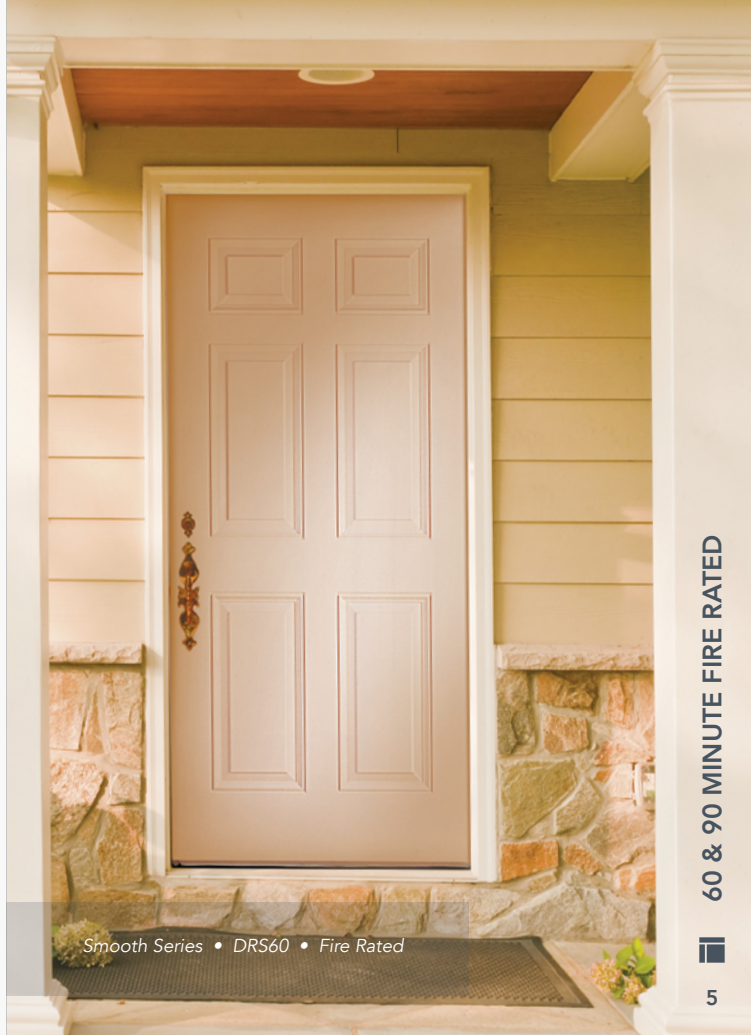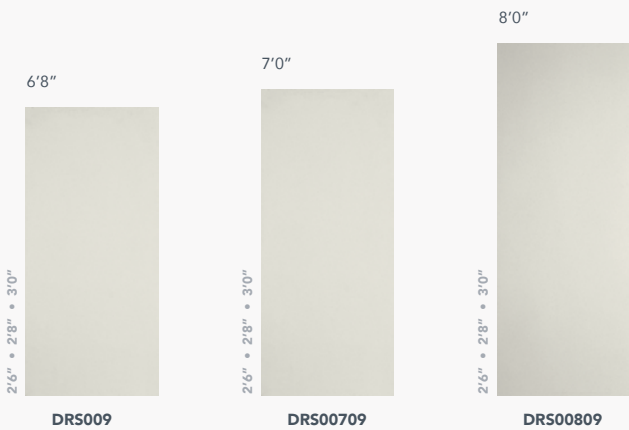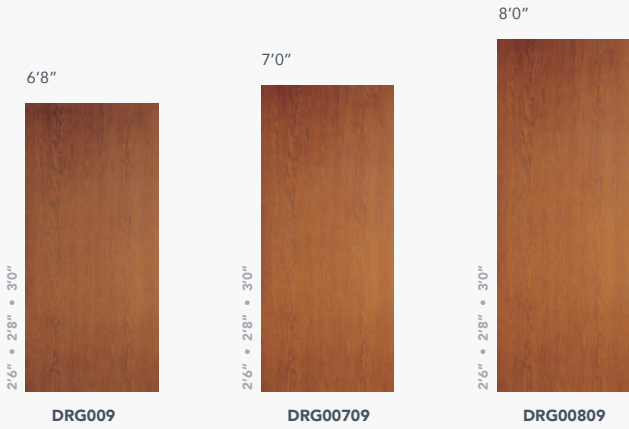

Smooth Series • DRS60 • Fire Rated

● IN STOCK   ● EXTENDED LEAD TIME

60 & 90 MINUTE FIRE RATED



# PFT™ DOOR JAMBS

Our exclusive PFT™ Door Jambs add needed protection for your entry units. Also made with fire retardant composite, Plastpro Poly-Fiber Jambs are tested and certified to withstand fire for 20 minutes. Complete your protection by fitting your fiberglass door with PFT™ Door Jambs.

## FEATURES & BENEFITS

- Equipped with HydroShield technology, it will not absorb or wick moisture, and prevents warping, rotting, and splitting.
- Frame is not able to be infested with termites at any point along the structure.
- More versatility in design. Available in various lengths and widths that can be stained as well as painted.
- Has twice the screw holding power of traditional wood door frames.

## FRAME DECAY COMPARISON



**PLASTPRO PFT™ DOOR JAMB**

\*with Hydroshield Technology™



**TRADITIONAL WOOD FRAME**

Susceptible to rotting, warping and decay

## TESTING RESULTS

**ULC 10 C / NFPA 252 / ASTM E 2074 | FIRE RATED  
CSFM 12-7A-1 | EXTERIOR WILDFIRE EXPOSURE TEST**

- All PFT™ Door Jamb are tested for single swing units only.



## GRAIN STYLES



● OAK GRAIN



● FIR GRAIN



● MAHOGANY




● PRIMED



● WHITE CAPPED

**NOTES**

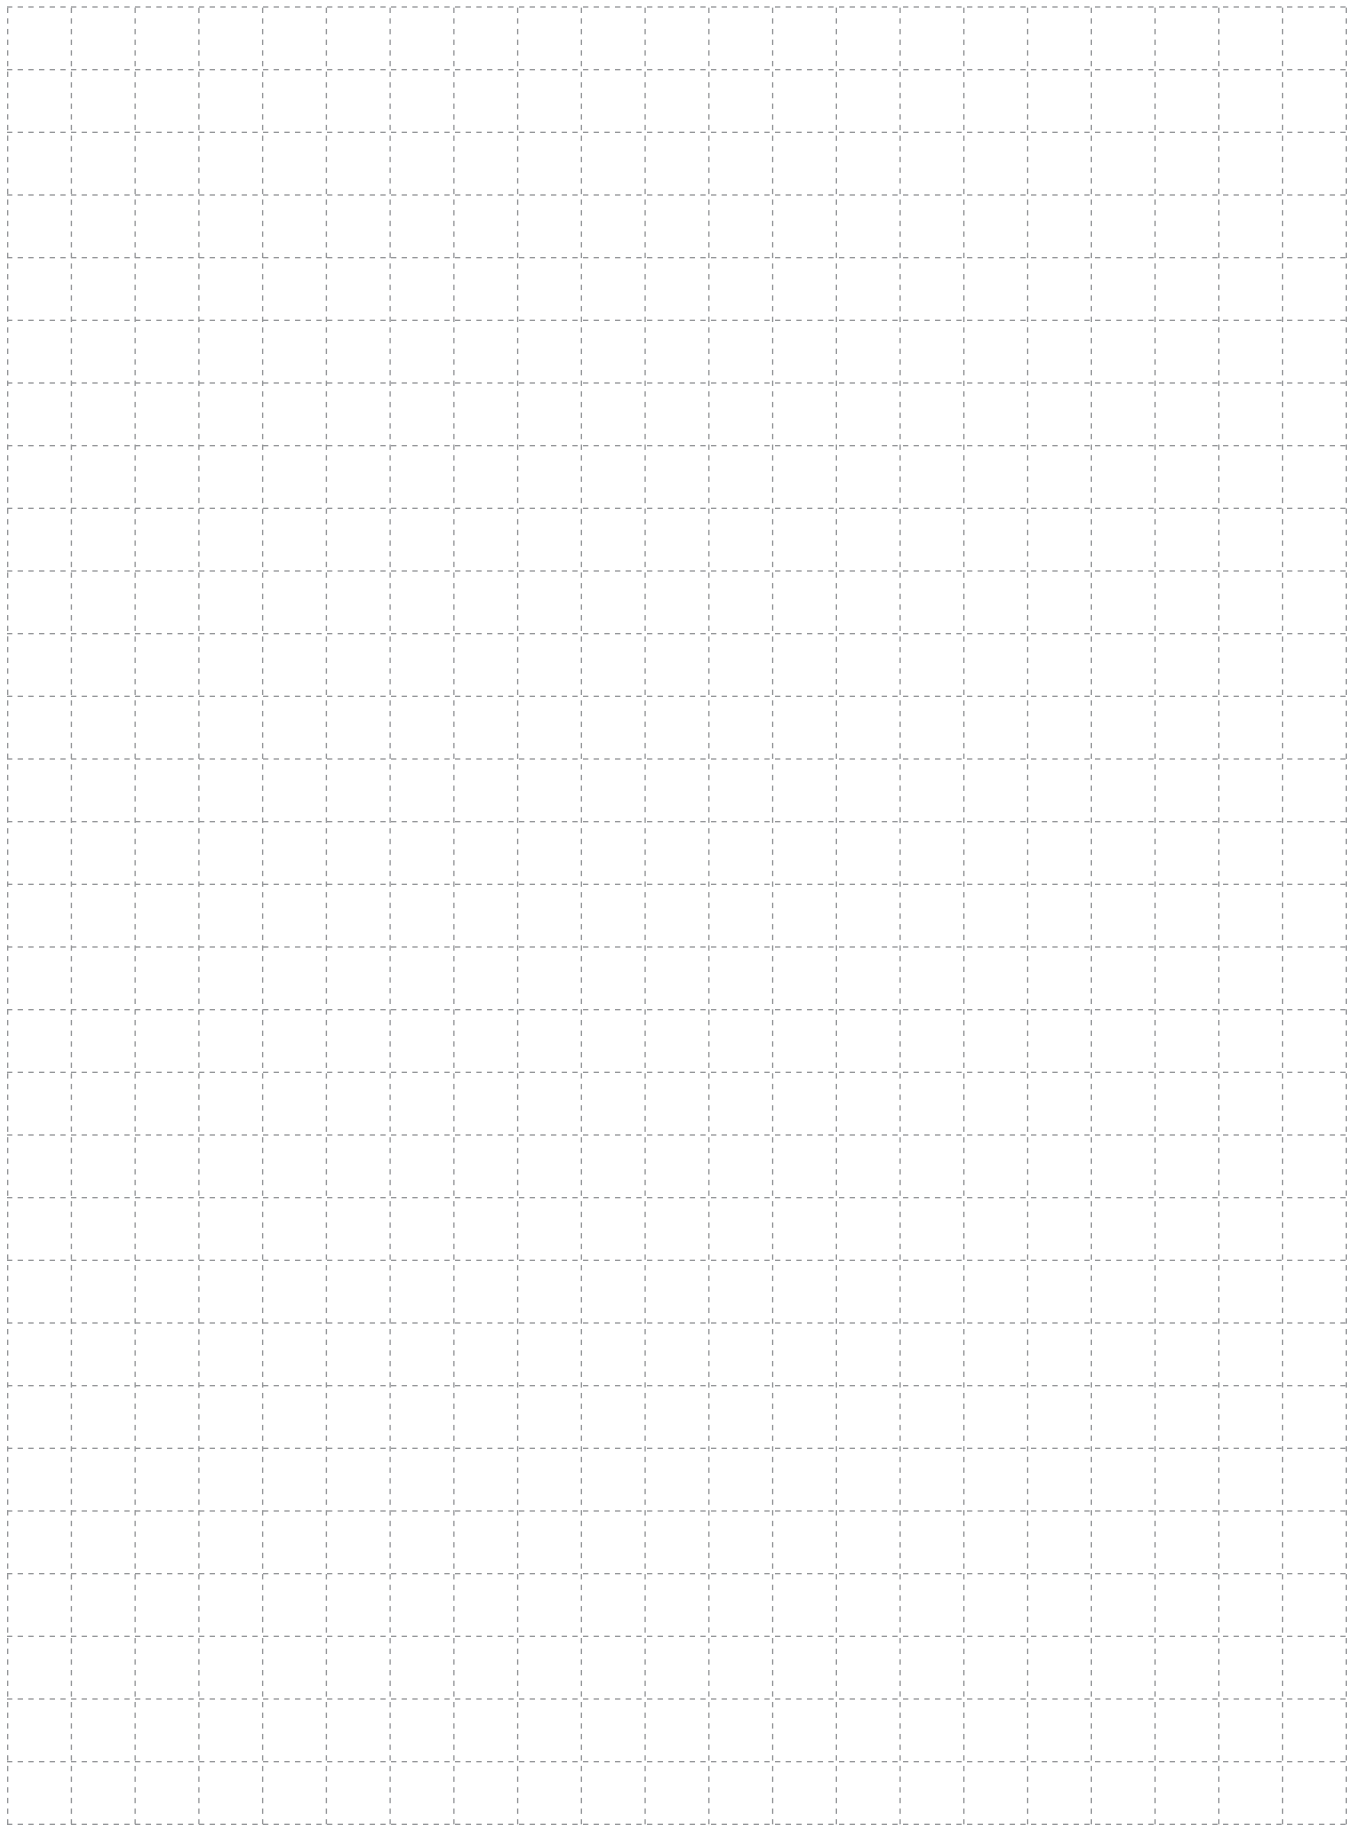



PLASTPROINC.COM

5200 W. Century Blvd, 9th Floor ■ Los Angeles, CA 90045

Phone: (800) 779-0561 ■ Fax: (310) 693-8620



© 2020 Plastpro Inc. All Rights Reserved

Product # MKLFRB2020 Updated March 2020